




## Standard Equipment

- ✓ Single-phase 230V/50Hz electric motor
- ✓ Direct control with 3-pushbutton IP65 5-m pendant control
- ✓ Swivelling bracket
- ✓ Upper limit safety device
- ✓ Self-braking motor with magnetic device

## Applications

It simplifies assembly operations and provides particular technical solutions which differentiate it from traditional hoists. After having put the hoist at the foot of the structure, during use it is sufficient to move the swivelling bracket into the desired position. Versatility and high resistance of the swivelling bracket to atmospheric agents: equipped with quick attachment, adaptors for various types of scaffolds and work positioning lever, it can be also applied at half-structure using the optional scaffold attachment.

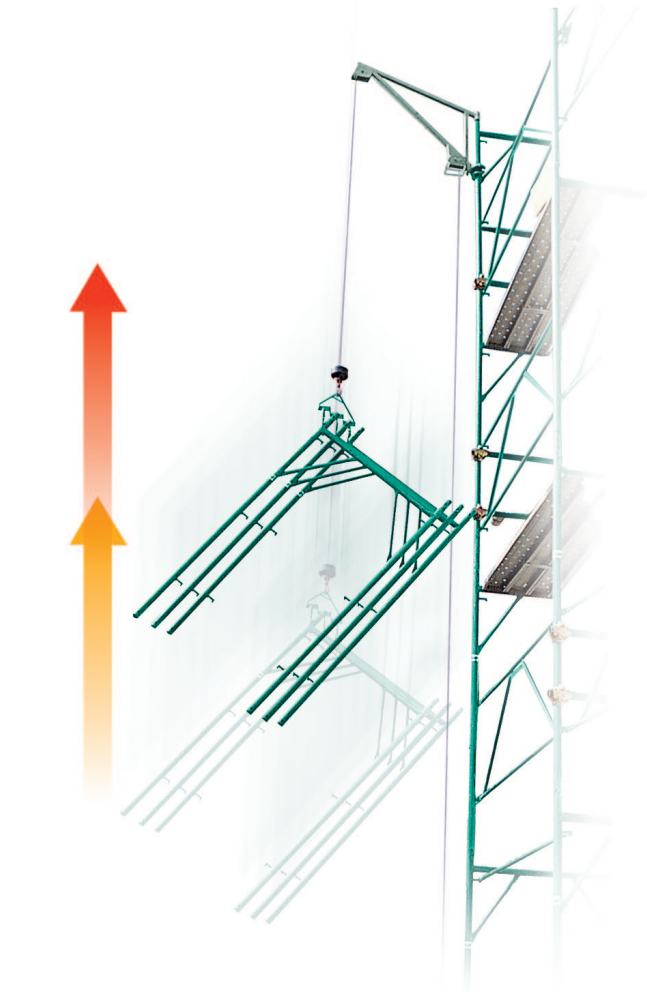

AP 150		
Maximum capacity	kg	150
Av. full load lifting speed min./max. m/min	m/min	30
Max. working height	m	40
Ø steel rope	mm	4
Rope length	m	81
Motor power rate 230V/50Hz	kW	0,8
Motor speed min./max.	rpm	1350
Running current	A	7,1
Machine weight without bracket	kg	50
SPL in operator's position	dB(A)	<72
Dimensions w/l/h	mm	355/570/330
Packing dimensions w/l/h	mm	410/540/350