

# MOVER 270d EVO

Pneumatic conveyor for conventional and premixed floor screeds, with high performance and automatic pumping cycle

## APPLICATIONS

For conveying conventional and premixed floor screeds



### MOVER 270db EVO Diesel engine

- With loading bucket
- Cod. 1106225



### MOVER 270dbr EVO Diesel engine

- Towable • With loading bucket
- Cod. 1106220



Double acting lift cylinder



Loading bucket with high slope (up to 65°)




High noise absorption engine bonnet



Chassis approved up to 140 km/h  
(Road towing speed is defined in each country by the respective road code)




Mixing system with reversal of rotation direction

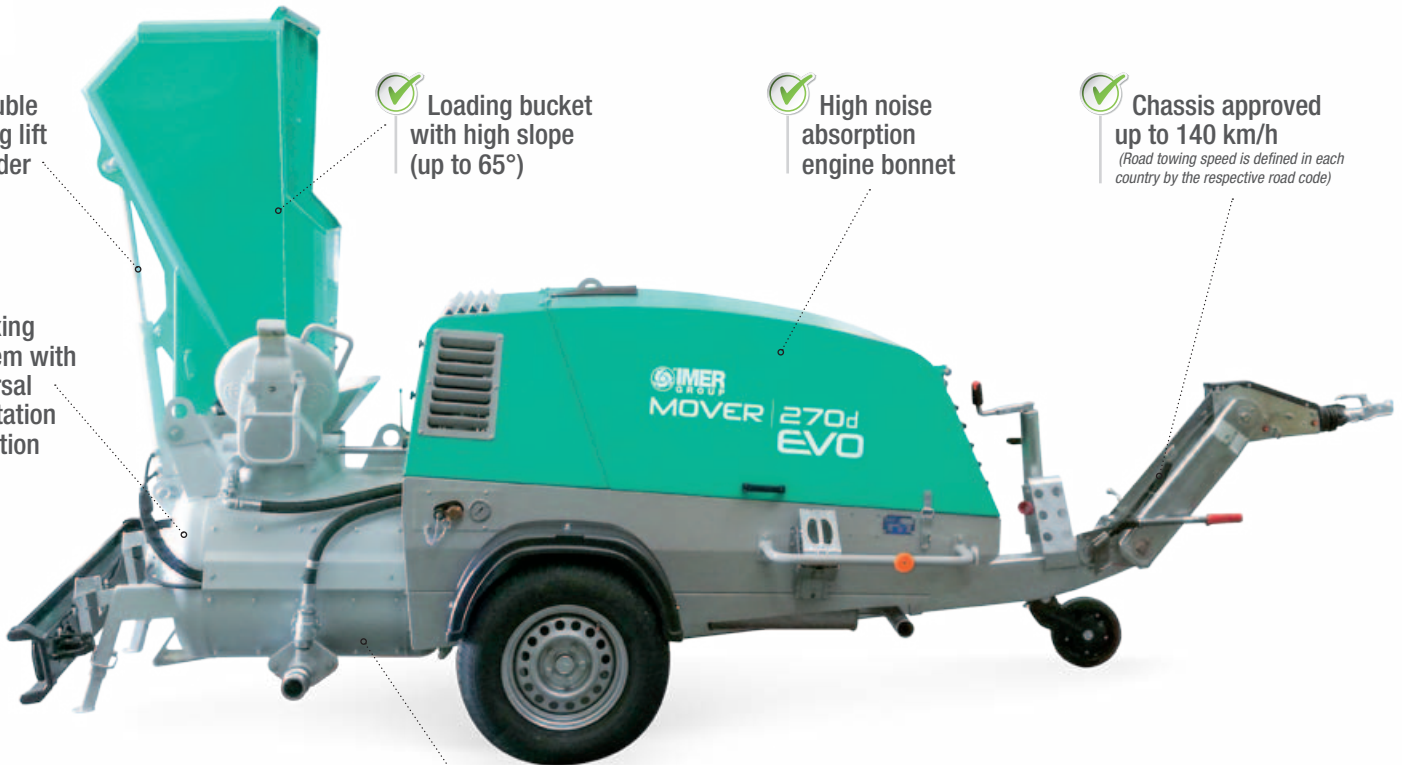

FAST-LOCK compressor-Diesel engine direct coupling



Tank internal protections in wear resistant steel

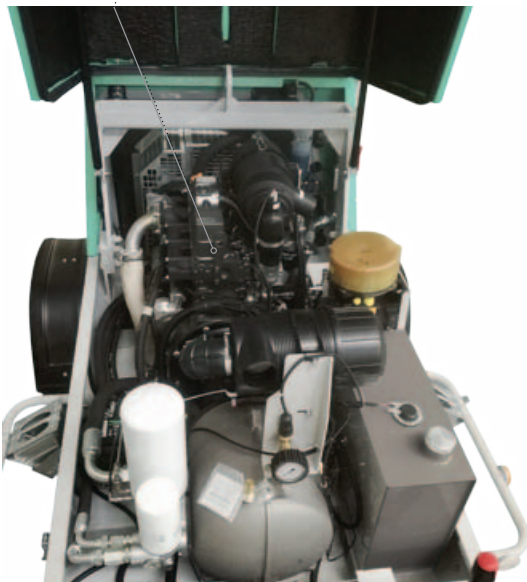


Yanmar Diesel engine 35 kW, 4-cylinder

## Standard Equipment

- ✓ FAST-LOCK built-in compressor with direct drive
- ✓ Certified pressure tank 270 l
- ✓ 195 R14 tyres
- ✓ Non road-towable drawbar (Mover 270db)
- ✓ Road-towable drawbar, parking brake and light units (Mover 270dbr/270dbr)
- ✓ Loading bucket (Mover 270 db / dbr)
- ✓ 20+10+10 m material hose Ø 60 mm with cam couplings
- ✓ Tripod stand with Ø 60 mm coupling
- ✓ 2 hose holder fittings
- ✓ Material outlet manifold Ø 60 mm
- ✓ Built-in hydraulic power system
- ✓ Manual grease pump
- ✓ Box for cleaning accessories
- ✓ Central lifting hook for controlled balance
- ✓ Multifunction hour meter
- ✓ Telescopic outrigger pads

## Optional Accessories

- ✓ Automatic timed grease system
- ✓ High pressure cleaner 140 bar

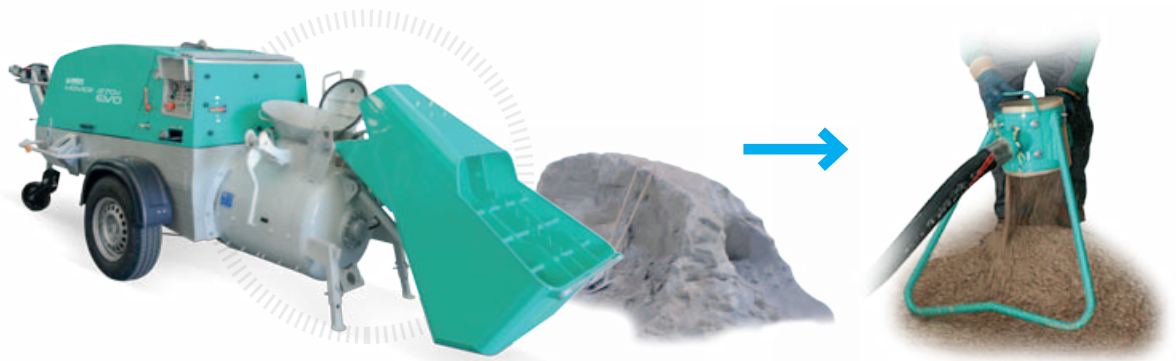

Jet breaker stand



- Automatic pumping cycle with progress indicator
- Adjustable mixing time cycle
- Adjustable pipes emptying automatic cycle
- FULL-CHECK automatic self-diagnostic panel
- Multifunction hour meter with machine parameters indicator
- SMARTSTOP fuel reserve

✓ Quick compressed air connection

✓ Self-steering tug axle with reinforced wheel



✓ Pressurized hatch gasket for wear recovery



FAST-FLOW cooling system



Hatch with built-in safety valve for easy and safe handling



Drawbar with lights (road-towable version "R")



Cable and rope coilers with scraping shovel (optional)

		Mover 270db EVO	Mover 270dr EVO	Mover 270dbr EVO
Motor power rate	kW	35	35	35
Compressor flow rate	l/min	4340	4340	4340
Compressor max. pressure	bar	7	7	7
Max. transportable grain size	mm	12-16	12-16	12-16
Average cycle output	l	220	220	220
Tank capacity	l	270	270	270
Loading height	mm	660	1000	660
Dimensions width/length/h	mm	1470/4903/2521 with bucket raised	1470/4963/1603	1470/4903/2521 with bucket raised
Weight	kg	1760	1680	1790
Sound pressure level	dB (A)	< 99	< 99	< 99
Loading bucket	-	yes	no	yes
Road towing kit	-	no	yes	yes